




KES-FB4-A

Surface Tester

The KES-FB4-A Surface Tester analyzes hand movements—particularly, sliding over surface—performed by artisans and professionals when judging a fabric’s texture. This device performs this movement mechanically, making it possible to obtain objective numerical data.

Obtainable data includes frictional coefficients, fluctuations of frictional coefficients, and surface roughness for such targets as general fabric, cloth, paper, non-woven fabric, and film-like samples. Surface friction and roughness characteristic data is useful for determining fullness and softness, smoothness, crispness.

Measurement General fabric, Fabric, Medicinal fabric, Car seats, Interior fabric,
Sample Example Non-woven fabric, Film-like samples

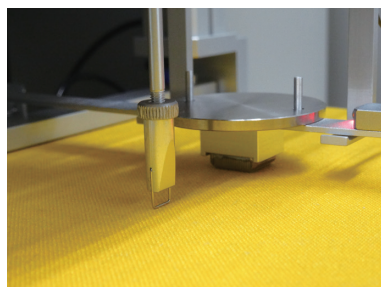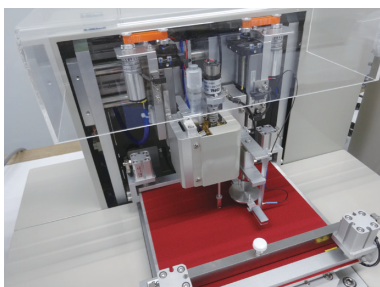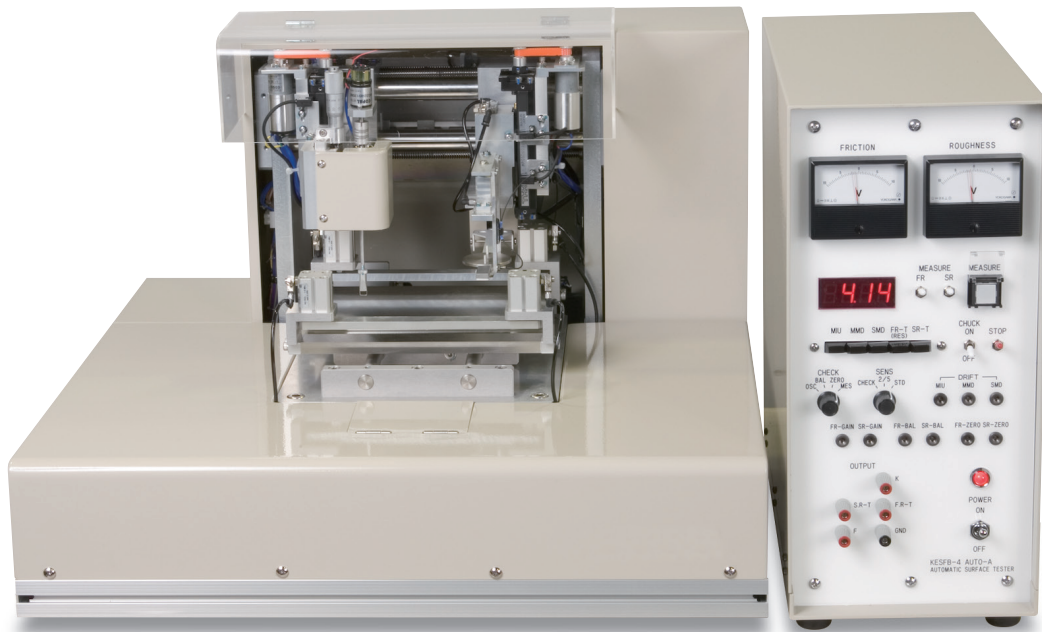


FEATURE

● Sensor that imitates fingertips


The sensor unit’s design features a load and surface treatment that mimics a fingertip, allowing for quantification similar to that of the human fingertip.

SYSTEM CONFIGURATION DIAGRAM / MEASUREMENT DATA

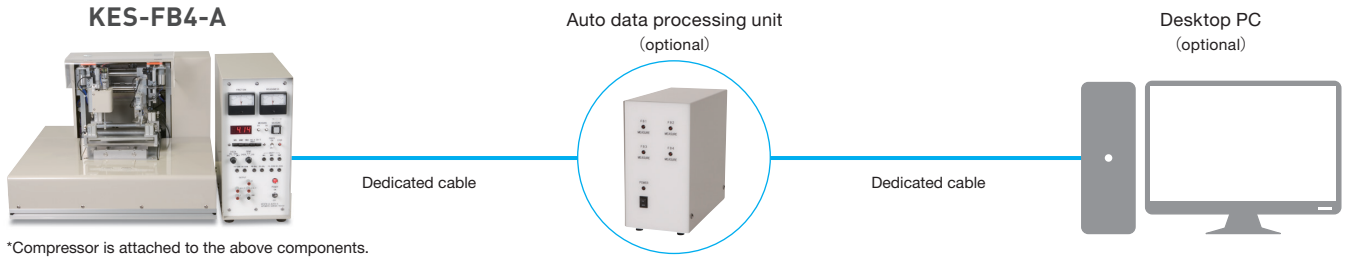

*Compressor is attached to the above components.

Sample Measurement Software Screens

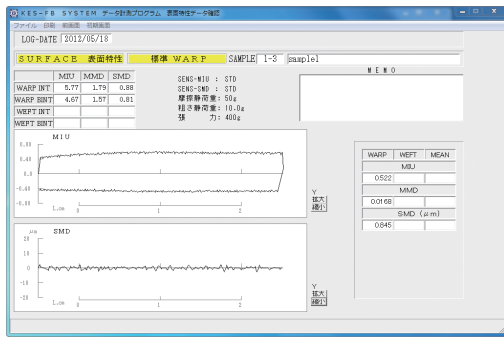

▲ Surface properties

Obtainable Data

Item	Characteristic value	Description	Reading the data
Surface properties	MIU	Mean frictional coefficient	Higher values mean less tendency to slip
	MMD	Fluctuation of mean frictional coefficient	Higher values mean less smoothness and more roughness
	SMD	Surface roughness	Higher values mean more surface unevenness

KES-FB4-A Surface Tester

Dimensions/Weight (approx.)	Measuring unit: W550 × D520 × H420 (mm) / 45 kg Electronic unit: W180 × D400 × H400 (mm) / 10 kg
Power source	100 VAC, power consumption: 50W Max. for the main device, 300W Max. for compressor.
Measurement environment temperature and humidity	20 to 30°C / 50 to 70% RH. (No condensation.) Temperature and humidity should be kept constant during measurement. (Standard temperature and humidity conditions: 20°C / 65% RH) *The instrument should be located to minimize influence from wind or vibrations.
Surface friction detection	Detector: Ring-type detector with differential transformer Load (full scale): 200 gf (with standard measurement) Accuracy: ±0.5% or less of full scale

Surface roughness detection	Detector: Differential transformer Displacement (full scale): 0.4 mm Accuracy: ±1.0% or less of full scale
Detection of surface measurement movement	Detector: Potentiometer Travel distance: 30 mm (Range of effective measurement distance: 20 mm) Accuracy: ±0.5% or less of full scale
Filter properties	Active secondary filter: $\mu = 0.6$, $\omega 0 = 1$ cps
Sensor size	Friction contactor: 10 mm × 10 mm Roughness contactor: 0.5 mm diameter single wire (contact surface width: 5 mm)
Velocity of Sample Movement	1 mm/sec (standard)
Specimen size	Dimensions: 20 cm × 20 cm (standard), Thickness: 2 mm (max.)

⚠ Precaution For safety use, please read the operation manual / the instruction carefully and thoroughly before using the tester.

Specification details recorded here are subject to change without notice. We appreciate your understanding.

KatōTech

KATO TECH CO.,LTD.



理宝科技有限公司 Libero Technology Company Limited

香港 Hong Kong T: (852) 2555 8222 F: (852) 2518 0115
上海 Shanghai T: 86 (21) 5655 8285 F: 86 (21) 5655 7752
广州 Guangzhou T: 86 (20) 3928 3292 F: 86 (20) 3298 3290

www.liberohk.com Email: sales@liberohk.com