


Four-pole electrode VE - D 991

for measuring of the volume resistivity of electrically conductive and antistatic materials with the four-pole method (Kelvin) according to ASTM D 991

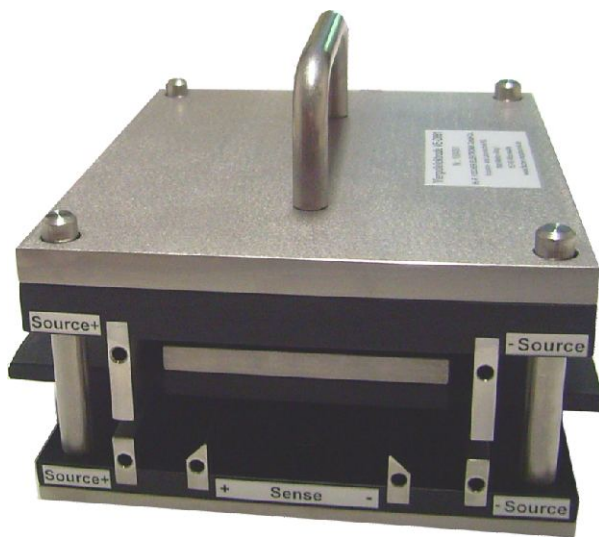


The four-pole electrode VE - D 991 was developed for the measuring of the volume resistivity of electrically conductive and antistatic materials according to the four-pole method.

The structure of the electrode complies with the standard ASTM D 991.

The special constructive design of the electrode allows a simple and sure bonding of the test specimen.

A precise measuring is possible in connection with the measuring instruments Milli-TO 3 and MO 3 in the low ohm range.

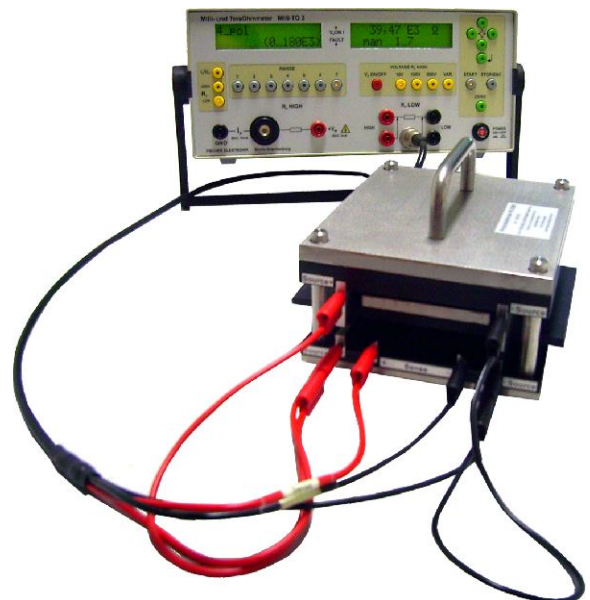

VE - D 991 with Milli-TO 3 (optional)

- ▶ construction made of high grade steel quality (V2A) and PVC black
- ▶ contact surfaces made of high-grade steel (V2A)
- ▶ four-pole electrode according to ASTM D 991
- ▶ distance between potential electrodes: 50 mm
- ▶ specimen size (mm):

min. length	100
max. depth	150
max. Height	25
- ▶ connection with Milli-TO 3 und MO 3
- ▶ weight potential electrode: approx.. 0.9 kg
- ▶ weight current electrode: approx.. 3.0 kg
- ▶ also a special model VE - D 991 HT for high temperature application up to 130 °C available

optional accessoires:

High-Ohm measuring cable set
 High-Ohm measuring cable set HT (high temperature application up to 130 °C)
 Custom-designed High-Ohm measuring cable set upon request